



INTRODUCTION

- Stable long life.
- Low inductance.
- Can be produce according to customer's request.
- Compact type with safety design of non-flammability and insulation.
- application aroma diffuser heater Application for


CHARACTERISTICS

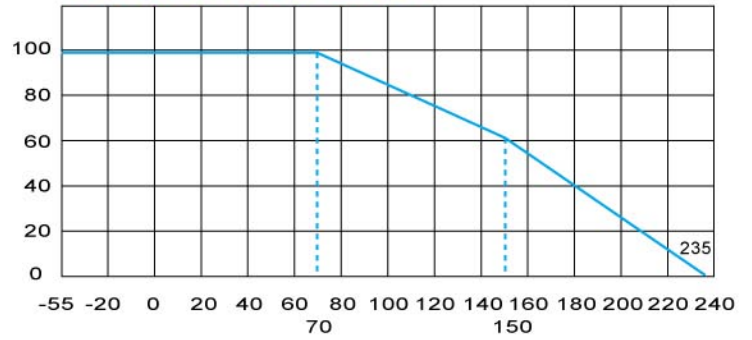


SQA-R TYPE

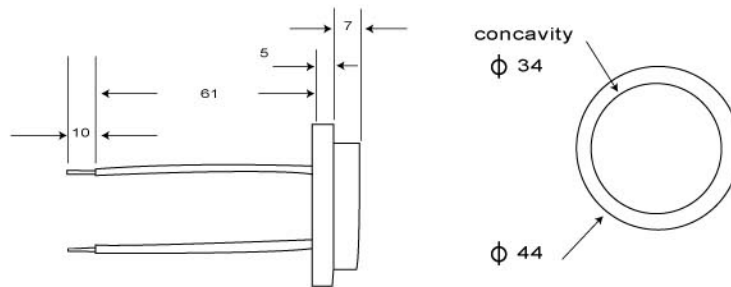


SQA-S TYPE

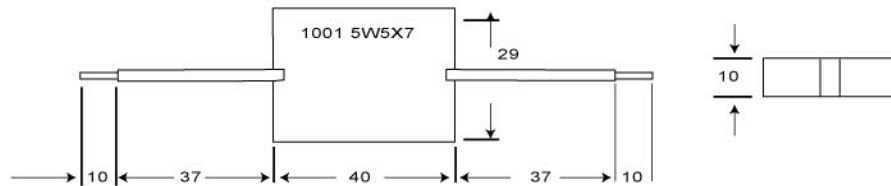

SQA-M TYPE 8W

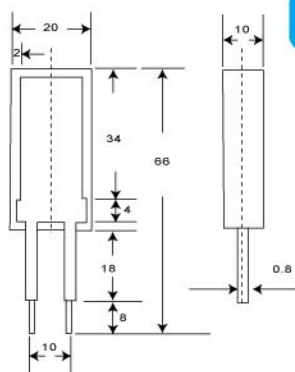

SQA-M TYPE 18W

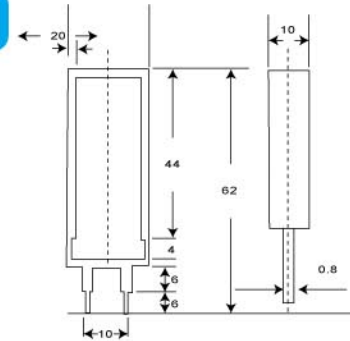

CHARACTERISTICS

ITEM	SPEC	REMARKS
Load life under high temperature	$\pm 5\%$	Rated voltage at 70°C for 1,000 hours
Load life under high humidity	$\pm 3\%$	56 days ; 400C ; 90 to 95% RH
Temp. coeff. of resistance	R \leq 1W : $\pm 600\text{ppm}/^\circ\text{C}$ R>1W : $\pm 350\text{ppm}/^\circ\text{C}$	Room temp. + 100°C
Short time overload	$\pm 2\%$	10 times the rated power for 5 seconds
Temperature cycling	$\pm 1\%$	5 cycles for -55 ~ +155°C
mmersion in solder	$\pm 1\%$	350°C for 3 seconds
Insulation resistance	>100M Ω	500V (DC) : 1 minute